



FX180 | FX240 | FX280  
SOFTMOUNT WASHER-EXTRACTORS



**TOUCH CONTROL AVAILABLE**  
Multilingual user-friendly 7" touch control



**460G EXTRACTION SPEED**  
Less moisture for a more efficient drying process



**CLOUD-BASED PLATFORM**  
to easily monitor your laundry everywhere and at any time



**IMPROVED DURABILITY**  
for your peace of mind with a 3-year warranty



**CASCADE DRUM TECHNOLOGY**  
Extra mechanical action thanks to its cascading shape of the surface

FEATURES & BENEFITS

Features

- Stainless steel top, drum and tub and anthracite front and side panel
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Cascade Drum - Patented drum
- Large drain valve (Ø 76 mm)

Options

- Coin operated
- Stainless steel cabinet
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3<sup>rd</sup> water inlet
- Weighing System
- Double door glass Execution

Control


- XControl FLEX PLUS - fully programmable and customizable cycles 7" touch screen.
  - User-friendly screen with operating instructions built in as part of the control
  - Complete control content available in 34 languages
- XControl - fully programmable control with 20 Pre-set programs and memory up to 99.
- XTronic - Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)

## SPECIFICATIONS

TYPE		FX180	FX240	FX280
<b>INNERDRUM</b>				
Capacity 1:09	kg (lb)	20 (44)	27 (60)	31 (68)
Capacity 1:10	kg (lb)	18 (40)	24 (53)	28 (62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
<b>DRUM SPEED</b>				
Wash	rpm	42	42	42
Extraction	rpm	1047	1035	975
G-FACTOR		460	450	400
<b>HEATING</b>				
Electricity	kW	12 - 18	12 - 18	21, 9
Steam	bar	1-8	1-8	1-8
Sound pressure level	dB (A)	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20-50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
<b>DIMENSIONS</b>				
Size H×W×D	mm	1430×970×970	1430×970×1105	1430×970×1185
Net weight	kg	380	430	495
<b>TRANSPORT DATA</b>				
Packed H×W×D	mm	1550×1025×1015	1550×1025×1150	1550×1025×1225
Gross weight	kg	395	450	515

## DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
FX180	806	758	970	24	477	1430	90	48	970	906	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113
FX240	806	758	970	24	477	1430	90	48	1105	1041	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113
FX280	806	758	970	24	477	1430	90	48	1185	1116	1320	1297.5	1215	490	108.5	270	203	274	67	1315	80	293	610	218	113
	width			height			depth																		

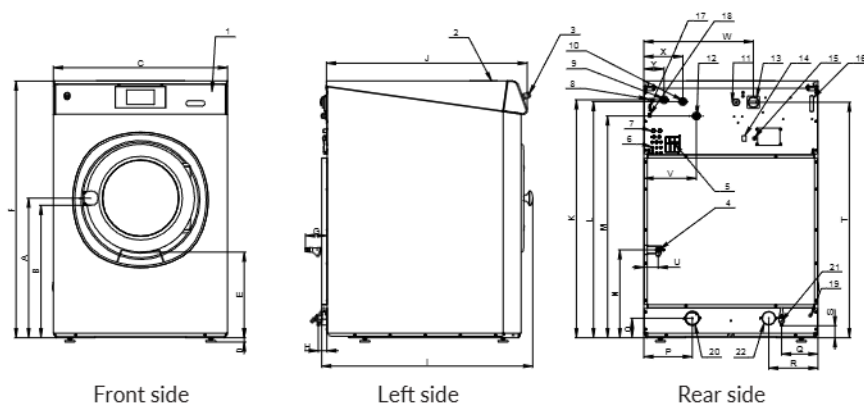

- |                                     |  |  |
|-------------------------------------|--|--|
| 1. Control panel                    | 9. Cold water inlet, soft                  | 17. USB port - optional  |
| 2. Soap dispenser                   | 10. Cold water inlet, hard                 | 18. PC programming connection  |
| 3. Central stop button              | 11. Electrical connection                  | 19. Discharge water cable inlet  |
| 4. Steam connection                 | 12. Hot water inlet                        | 20. Drain valve - 3 in. [76 mm]  |
| 5. Air relieve                      | 13. Main switch                            | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 6. Liquid soap connection           | 14. Heating change-over switch             | 22. Drain valve or recycle valve - 3 in. [76 mm] (FX280 models only)         |
| 7. Recycle water inlet              | 15. Liquid soap pump electrical connection |  |
| 8. Recycled water valve cable inlet | 16. Fuses                                  |  |